

FlashEdge™ GRAVEL STOP

TPO Low Slope Systems

OVERVIEW

FlashCo's FlashEdge TPO Coated Metal Gravel Stop is available in standard 2"x3" and 3"x3" profiles, each with a 3/8" kick, angled 30° away from the wall. FlashEdge TPO Gravel Stop products are manufactured using 24-gauge, G90 galvanized steel sheet that is coated with a layer of .025" non-reinforced TPO. TPO membrane may be welded directly to FlashEdge metal, eliminating the need for adhesive perimeter strips.

**Custom profiles and colors available by request*

APPLICATION


FlashCo's FlashEdge TPO coated Gravel Stop is used on single ply roofing systems as perimeter edge metal to prevent moisture intrusion and control the flow of water away from fascia and siding materials as well as helping contain ballast materials on roofing systems that utilize them.

INSTALLATION

Installation of FlashEdge TPO Coated Gravel Stop in any form shall be in accordance with the recommendations and specifications of the roofing material manufacturer.

1. Install TPO Coated Metal with 1/8" - 1/4" between adjoining sections.
2. Prepare all welding surfaces by cleaning with TPO membrane cleaner.
3. Heat-weld TPO non-reinforced flashing over joint.
4. Position TPO reinforced membrane and heat-weld to the TPO Coated Metal
5. Apply cut edge sealant (provided by others) along edge of reinforced material.

**Typical properties and characteristics are based on samples tested and are not guaranteed for all samples of this product. This data and information intended as a guide and does not reflect the specification range for any particular property of this product.*

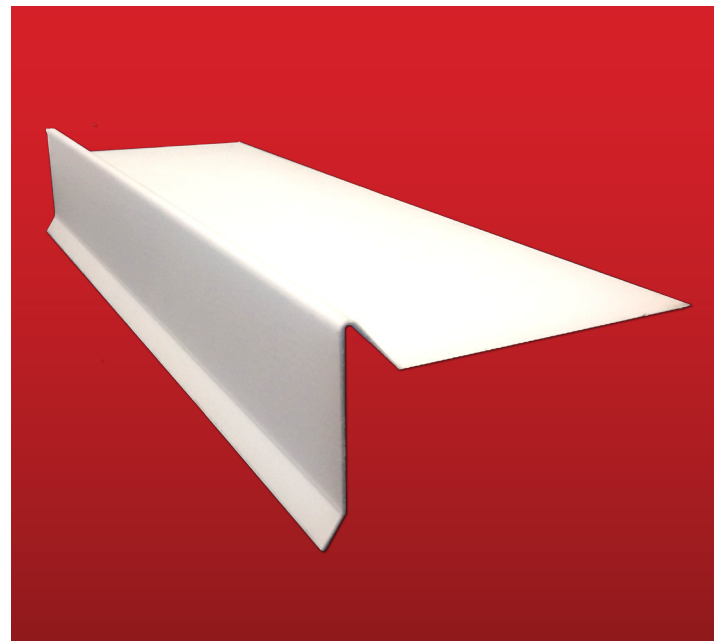

FEATURES AND BENEFITS

- Allows direct welding of membrane to deck
- Eliminates the need for adhesive stripping
- Available in multiple colors

SAVING THE CONTRACTOR TIME

- FlashCo strives to ship 90% of orders within 1-3 days after purchase orders are placed
- Get off the roof sooner
- Reduce installed costs

STANDARD SIZES & PACKAGING

Size	Qty./Bundle
2" face x 3" on roof (3/8" kick @ 30°)	10 sticks
3" face x 3" on roof (3/8" kick @ 30°)	10 sticks

MATERIALS & COLORS

Steel Thickness	Galvanized Coating	TPO Coating Thickness	Colors
0.024" nominal	G90	0.025" nominal (25 mil)	White, Gray, Tan Dark Bronze Slate Gray (others upon request)

