

FlashAccessory™

MOLDED T-JOINT COVERS

TPO Low Slope Systems

OVERVIEW

FlashCo's FlashAccessory Molded TPO T-Joint Covers are used to cover and seal the intersections of three or more layers of membrane, also known as "step-off's." FlashCo's T-Joint Covers are 60 mil non-reinforced TPO and measure 4.5" in diameter. Markings at four points on the T-joints make centering over step offs, easy and accurate. Standard packaging is 100 T-Joint Covers bagged and boxed.

INSTALLATION

Installation shall be installed in accordance with the recommendations and specifications of the roofing material manufacturer. Keep T-Joints in plastic bag in until installation to avoid any oxidation.

1. Prepare all welding surfaces by cleaning with TPO membrane cleaner.
2. Center T-Joint Cover over the intersection in the membrane field using 4 indicators as reference.
3. Begin heat welding at center point, progressing outwards as you weld.
4. Completely weld the cover, using the edge of the roller to press the T-Joint Cover into step-offs.




FEATURES AND BENEFITS

- Saves labor time in comparison to field fabrication
- Each T-Joint Cover is uniform in shape and size
- Indicators at 4 points make centering patches easy and accurate
- Faster and easier to prepare and apply than hand cut patches
- Injection molded with quality TPO for reliable welds

SAVING THE CONTRACTOR TIME

- FlashCo strives to ship 90% of orders within 1-3 days after purchase orders are placed
- Get off the roof sooner
- Reduce installed costs

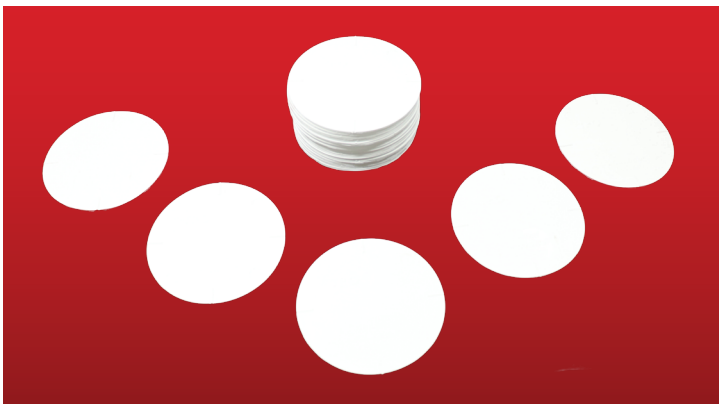

STANDARD SIZES & PACKAGING

Description	4.5"
Material	60 mil non-reinforced TPO
Quantity	100ea/box
Packaging Size	5"x5"x6" box
Box Weight	4.0 lbs.
Colors	White

