

FlashMembrane™ NON-REINFORCED MEMBRANE FLASHING

TPO Low Slope Systems

OVERVIEW

FlashMembrane is a 55-mil TPO (thermoplastic polyolefin) membrane used to field flash penetrations and other waterproofing details. FlashMembrane is available in 24"x 50' (100 sq ft) rolls, with color options of white, gray, and tan.

INTENDED USES


FlashCo's FlashMembrane has excellent flexibility and weldability, making it a perfect choice to field fabricate corners, patches, and various other TPO roof components and flashings.

INSTALLATION

Installation of FlashCo's FlashMembrane in any form shall be in accordance with the recommendations and specifications of the roofing material manufacturer. FlashMembrane is used to flash various roofing system details and penetrations. The specific installation method will vary based on the situation.

1. Prepare all welding surfaces by cleaning with TPO membrane cleaner.
2. Heat-weld TPO non-reinforced flashing.
3. Use the edge of the roller to crease the flashing into any membrane step-offs for a proper seal.
4. Probe the edge of the membrane along all welds

**Typical properties and characteristics are based on samples tested and are not guaranteed for all samples of this product. This data and information intended as a guide and does not reflect the specification range for any particular property of this product.*

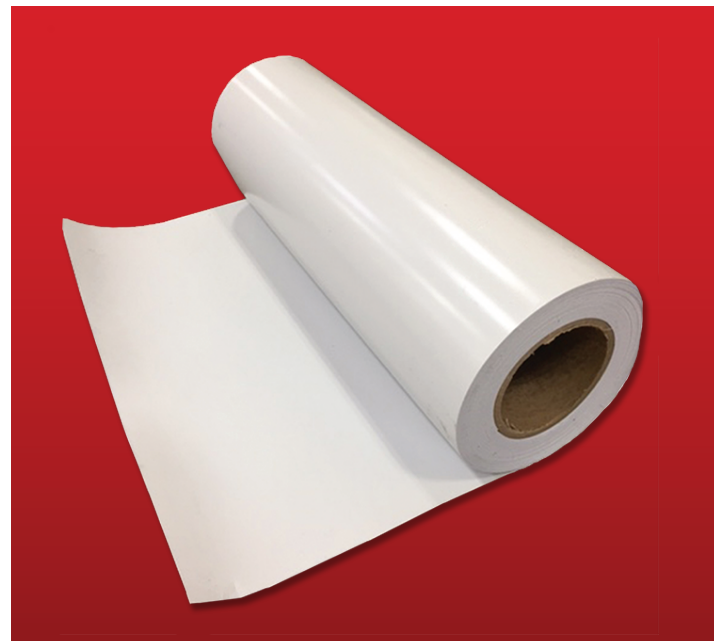

FEATURES AND BENEFITS

- Weldability allows for consistent, high-quality seams in penetrations and other critical roof areas
- Flexibility makes it easier to field-fabricate details when necessary
- Available in multiple colors

SAVING THE CONTRACTOR TIME

- FlashCo strives to ship 90% of orders within 1-3 days after purchase orders are placed
- Get off the roof sooner
- Reduce installed costs

STANDARD SIZES & PACKAGING

Size	Weight	Thickness	Material	Colors
2' x 50'	28 lbs.	0.055" (55 mil)	TPO	White, Gray (others upon request)

