

FlashWrap® SQUARE SPLIT BOOTS

TPO Low Slope Systems

OVERVIEW

FlashCo's FlashWrap TPO Square Split Boots are Factory Certified prefabricated flashings made from 60 mil reinforced TPO membrane. FlashWrap TPO Square Split Boots are designed to envelop common square penetrations where typical "closed" boots are unable to pass over obstructions like railings, crossbars, post-caps, and other fittings.


FlashCo's design provides a fast, simple solution to waterproofing posts, columns, and other square penetrations found on membrane roofs and decks. FlashCo offers a wide range of standard sizes from 2x2" square up to 6x6" square. The standard riser height is 8".

Rectangles, custom sizes, and custom colors made to order.

INSTALLATION

FlashWraps shall be installed in accordance with the recommendations and specifications of the roofing material manufacturer.

1. Prepare all welding surfaces by cleaning with TPO membrane cleaner.
2. Wrap boot around penetration
3. Heat weld vertical overlap using the penetration as backing.
4. Heat weld base flange to deck membrane
5. Install counter flashing per manufacturer's specifications
6. After the flashing has cooled, probe welds to verify a secure bond.
7. Apply cut edge sealant (provided by others) around edge of base.

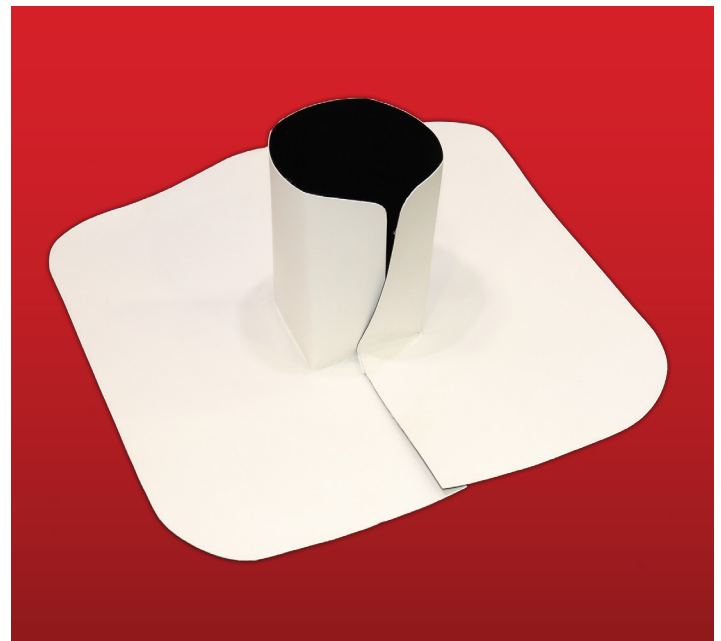

FEATURES AND BENEFITS

- Saves up to 60% of labor
- NDL and Discretionary Jobs
- Easy to install with obstructions

SAVING THE CONTRACTOR TIME

- FlashCo strives to ship 90% of orders within 1-3 days after purchase orders are placed
- All major membrane manufacturer brands in stock in all five FlashCo plant locations
- Get off the roof sooner
- Reduce installed costs

STANDARD SIZES & PACKAGING

Description	Qty/Box	Wt./Box	Box Size
2" x 2" Square	8	5.2 lbs.	12"x12"x12"
3" x 3" Square	8	6.8 lbs.	12"x12"x12"
4" x 4" Square	8	6.8 lbs.	16"x16"x12"
5" x 5" Square	8	6.8 lbs.	16"x16"x12"
6" x 6" Square	8	6.8 lbs.	16"x16"x12"

*Standard riser height is 8"
Also available in custom sizes & colors*

