

# FlashAccessory™ T-JOINT COVERS

PVC Low Slope Systems


## OVERVIEW

FlashCo's FlashAccessory PVC T-Joint Covers are factory cut and used to cover and seal the intersections of three or more layers of membrane, also known as "step-offs." FlashCo's T-Joint Covers are made with 60 mil non-reinforced PVC and measure 4.5" in diameter. They are available in white, gray and tan. Standard packaging is 100 T-Joint Covers bagged and boxed.

## INSTALLATION

Installation shall be installed in accordance with the recommendations and specifications of the roofing material manufacturer. Keep T-Joints in plastic bag in until installation to avoid an oxidation.

1. Center T-Joint Cover over the intersection in the membrane field.
2. Begin heat welding at center point, progressing outwards as you weld.
3. Completely weld the cover, using the edge of the roller to press the T-Joint Cover into step-offs.

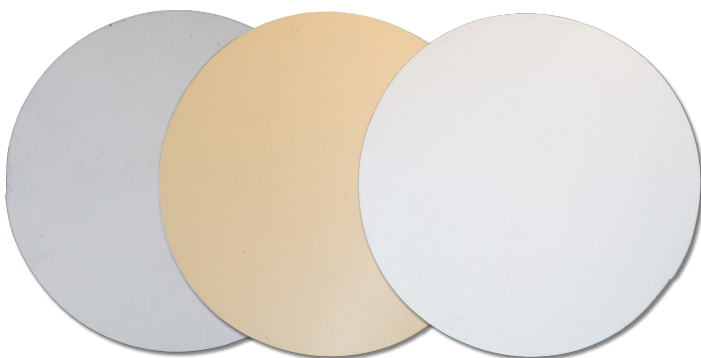

Colors L-R: Gray, Tan, White



## FEATURES AND BENEFITS

- Each T-Joint Cover is uniform in shape and size
- Available in multiple colors
- Faster and easier than hand cut patches
- Made with quality PVC for reliable welds

## SAVING THE CONTRACTOR TIME

- **FlashCo's Brand Promise is Speed:** shipping 90% of orders within 3 days.
- 24/7/365 Online Contractor Portal and additional time-saving tools
- Most orders delivered on FlashCo's own delivery trucks
- Get off the roof sooner

## STANDARD SIZES & PACKAGING

Description	4.5"
Material	60 mil non-reinforced PVC
Quantity	100 T-Joint Covers bagged & boxed
Packaging Size	6"x6"x6" box
Box Weight	3.5 lbs.
Colors	White, Gray, Tan

